





Vacuum Control Valves

NOVASEN

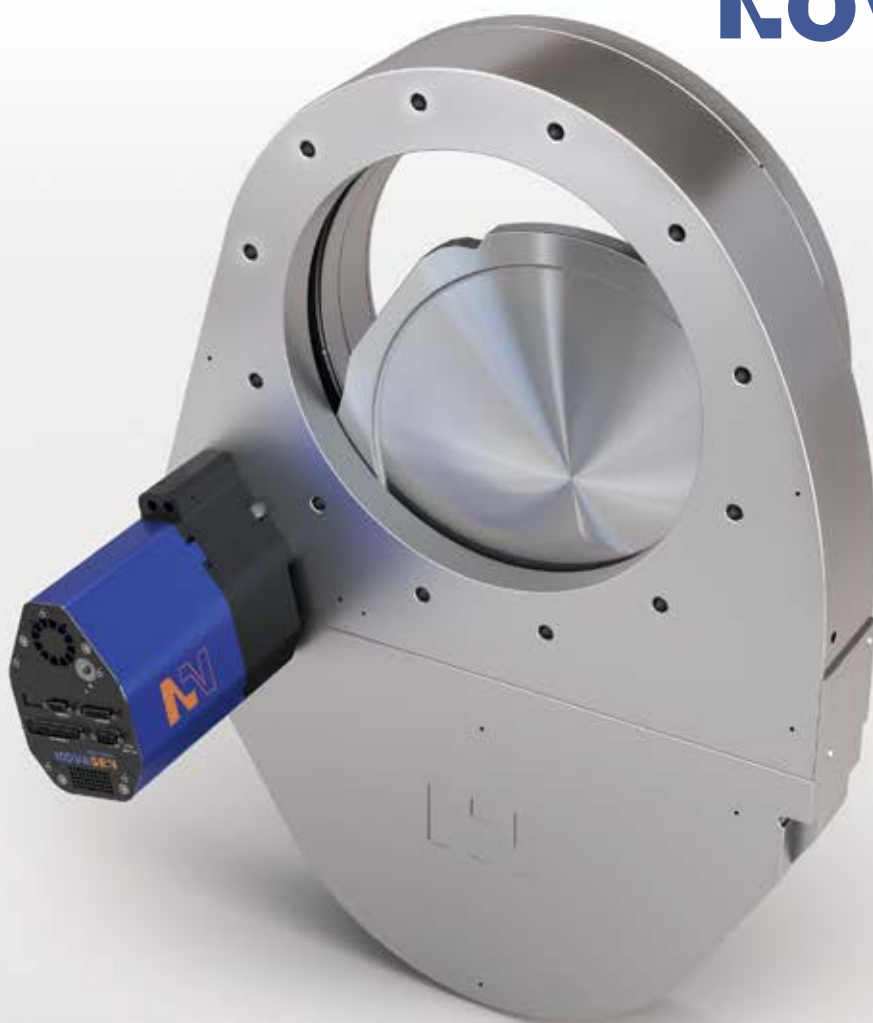

Make it Best or Not !

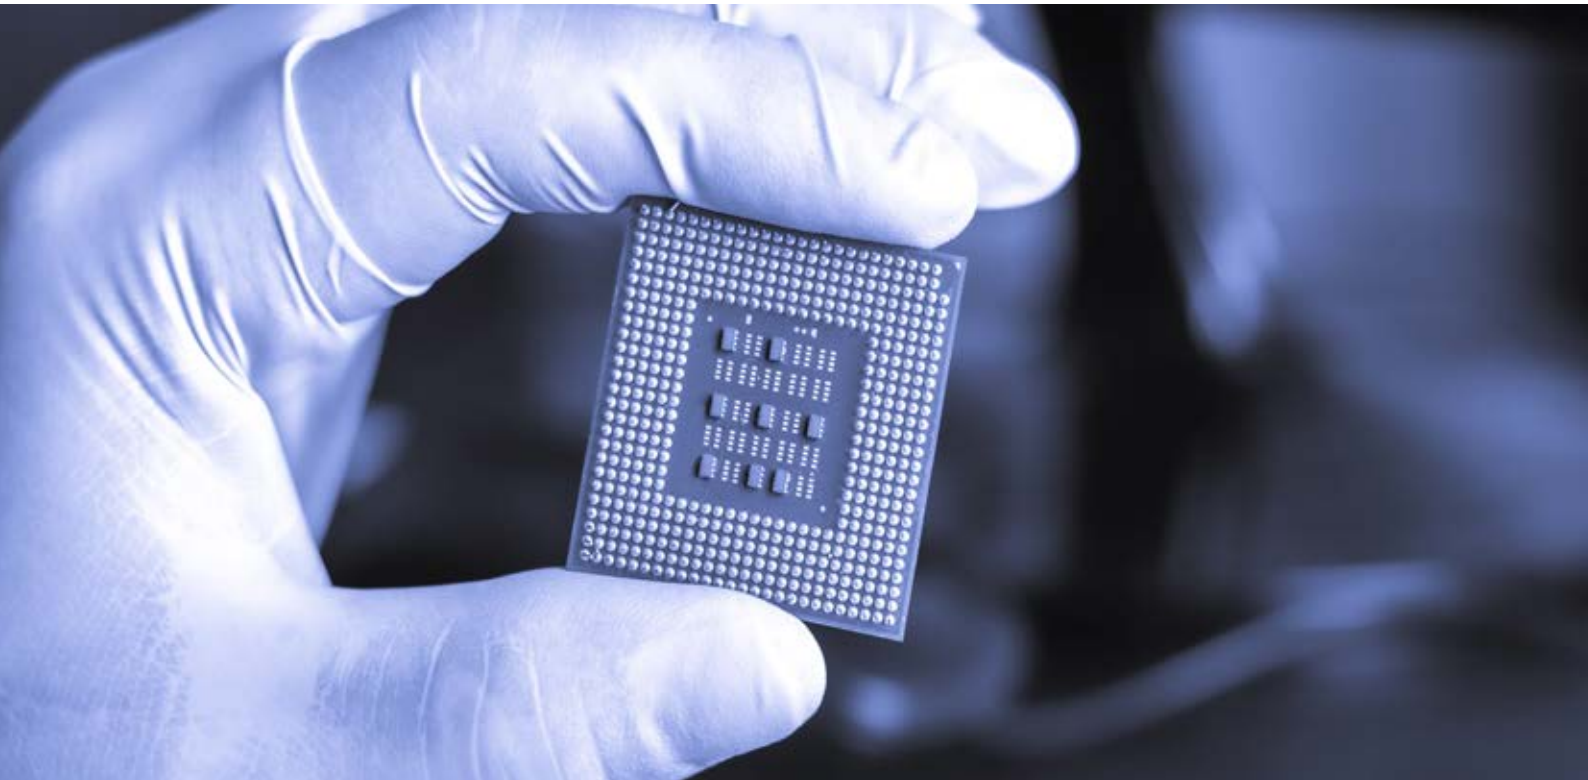

Content

1. Product Selection Guide	03
Product List	
2. Setup & Management S/W	04
3. APC Pendulum Valve	05
- DN100(4")	07
- DN160(6")	08
- DN250(10")	09
- DN320(12")	10
- DN350(14")	11

Product Selection Guide

A	P	X	350	F	B	LO	B	1	Quantity of Sensors	1 : 1 Sensor 2 : 2 Sensor										
									Power Option*	<table border="0"> <tr> <td>B : Basic</td> <td>S : with SPS</td> </tr> <tr> <td>P : with PFO</td> <td>D : with SPS and PFO</td> </tr> <tr> <td>E : Basic with VC master</td> <td>F : with SPS and VC master</td> </tr> <tr> <td>G : with PFO and VC master</td> <td>H : with SPS, PFO and VC master</td> </tr> </table>	B : Basic	S : with SPS	P : with PFO	D : with SPS and PFO	E : Basic with VC master	F : with SPS and VC master	G : with PFO and VC master	H : with SPS, PFO and VC master		
B : Basic	S : with SPS																			
P : with PFO	D : with SPS and PFO																			
E : Basic with VC master	F : with SPS and VC master																			
G : with PFO and VC master	H : with SPS, PFO and VC master																			
									Communication Interface	<table border="0"> <tr> <td>R2 : RS-232</td> <td>R3 : RS-232(Analog output)</td> </tr> <tr> <td>R4 : RS-485</td> <td></td> </tr> <tr> <td>LO : Logic</td> <td>DN : DeviceNet[®]</td> </tr> <tr> <td>PB : Profibus</td> <td>EN : Ethernet</td> </tr> <tr> <td>CC : CC-Link</td> <td>EC : EtherCAT</td> </tr> </table>	R2 : RS-232	R3 : RS-232(Analog output)	R4 : RS-485		LO : Logic	DN : DeviceNet [®]	PB : Profibus	EN : Ethernet	CC : CC-Link	EC : EtherCAT
R2 : RS-232	R3 : RS-232(Analog output)																			
R4 : RS-485																				
LO : Logic	DN : DeviceNet [®]																			
PB : Profibus	EN : Ethernet																			
CC : CC-Link	EC : EtherCAT																			
									Body Finishing	<table border="0"> <tr> <td>B : Blank</td> <td>N : Nickel-Coated</td> </tr> <tr> <td>H : Hard-anodized</td> <td></td> </tr> </table>	B : Blank	N : Nickel-Coated	H : Hard-anodized							
B : Blank	N : Nickel-Coated																			
H : Hard-anodized																				
									Method of Contract	<table border="0"> <tr> <td>J : JIS</td> </tr> <tr> <td>F : ISO-F</td> </tr> </table>	J : JIS	F : ISO-F								
J : JIS																				
F : ISO-F																				
									Flange Size	<table border="0"> <tr> <td>100 : DN100</td> <td>160 : DN160</td> </tr> <tr> <td>200 : DN200</td> <td>250 : DN250</td> </tr> <tr> <td>320 : DN320</td> <td>350 : DN350</td> </tr> <tr> <td>400 : DN400</td> <td>500 : DN500</td> </tr> </table>	100 : DN100	160 : DN160	200 : DN200	250 : DN250	320 : DN320	350 : DN350	400 : DN400	500 : DN500		
100 : DN100	160 : DN160																			
200 : DN200	250 : DN250																			
320 : DN320	350 : DN350																			
400 : DN400	500 : DN500																			
									Heating Type	<table border="0"> <tr> <td>X : No Heating</td> </tr> <tr> <td>H : Heating</td> </tr> </table>	X : No Heating	H : Heating								
X : No Heating																				
H : Heating																				
									Valve Type	<table border="0"> <tr> <td>P : Pendulum</td> </tr> </table>	P : Pendulum									
P : Pendulum																				
									Valve Model	<table border="0"> <tr> <td>A : APC</td> </tr> </table>	A : APC									
A : APC																				

* SPS = ±15V DC Sensor Power Supply
PFO = Power Failure Option (Valve closes or opens automatically at power failure)

Product List




Setup & Management S/W

Status Monitoring

Position and Pressure Control
Change Graph Watch and Save

Position and Pressure Control

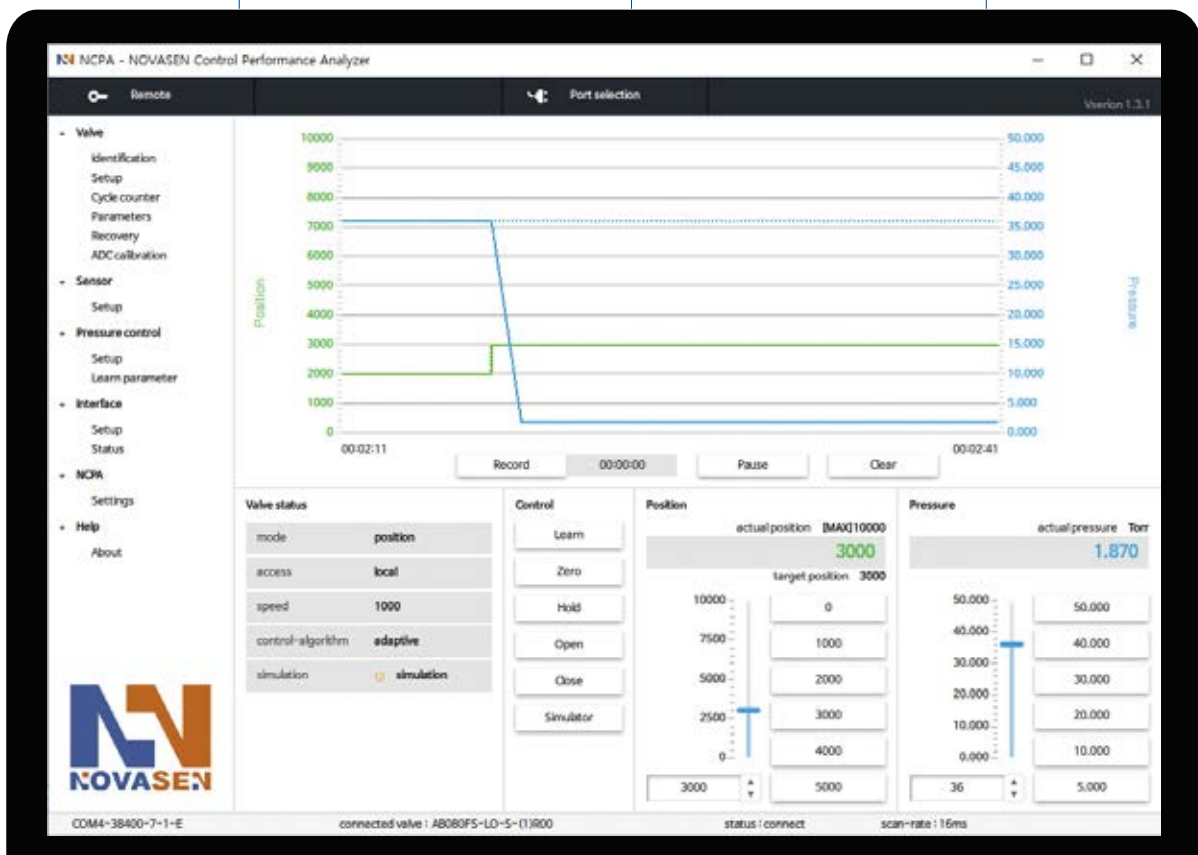

Auto Learn Mode

Interface Setup

Valve / Sensor Setup

Learn Data Save / Load

Pendulum

Product Specifications


Pressure range at 20°C ¹⁾	Blank aluminum		1 × 10E-8 mbar to 1.2 bar (abs)
	Hard anodized aluminum		1 × 10E-6 mbar to 1.2 bar (abs)
Leak rate to outside at 20°C ¹⁾	Valve body :	Blank aluminum	1 × 10E-9 mbar l/s
		Hard anodized aluminum	1 × 10E-5 mbar l/s
	Valve Seat :	Blank aluminum	1 × 10E-9 mbar l/s
		Hard anodized aluminum	1 × 10E-4 mbar l/s
Cycles until first service ¹⁾	Pressure control		1 million
	Closing / Opening		200,000 (unheated and under clean conditions)
Admissible operating temperature ²⁾	Valve body		≤120°C
	Controller		max. 50°C (≤ 35°C recommended)
Mounting position	DN100 ~ 250		Any ³⁾
	DN320 ~ 500		horizontal only ³⁾
Material	Valve body, plate		6061-T6
	Sealing ring		6061-T6
	Other parts		SUS 316L
Seal (Bonnet, plate, body, feedthrough)			FKM(Viton®)
Feedthrough	Actuator		rotary feedthrough
	Sealing ring		shaft feedthrough

1) Unheated on delivery.
 2) Maximum values : depending on operating conditions and sealing materials.
 3) Valve seat on chamber side recommended.


Power input ¹⁾	+24 VDC (±10%) @ 0.5V pk-pk max.[connector: POWER]	
Power Consumption	60 W max. (operation of valve with max. load) without PFO ⁴⁾	
Sensor power supply ²⁾	+24 VDC (±10%) / 36 W max. [connector : POWER] ±15 VDC (±5%) / 1A max. [connector : SENSOR]	
Input		
Output		
Sensor input		
Signal input	0-10 VDC	
Input resistance	100 kΩ	
ADC resolution	0.23 mV	
Sampling time	10 ms	
Digital inputs ³⁾	±24 VDC max.	
Digital outputs ³⁾		
Input voltage	70 VDC or 70 V peak max.	
Input current	0.5 ADC or 0.5 A peak max.	
Breaking capacity	10 W max.	
Ambient temperature	+50 °C max. (<35 °C recommended)	
Pressure control accuracy	0.1% of sensor full scale	
Position resolution / position control capability	13,000 steps (full stroke)	
Time throttling only	closing	1.1 ~ 1.5 s (full stroke)
	opening	1.1 ~ 1.5 s (full stroke)

1) Internal overcurrent protection by a PTC device.
 2) Refer to chapter «Sensor supply concepts» for details.
 3) Refer to chapter «Schematics» for details.
 4) PFO = Power Failure Option. Refer to «3.4 Behaviour in case of power failure» for details.


Electrical connections

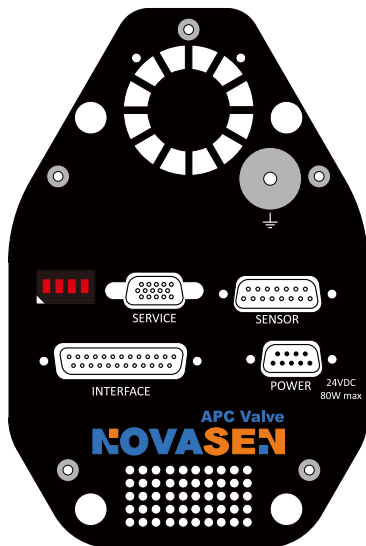


Logic, RS232, RS422, RS485

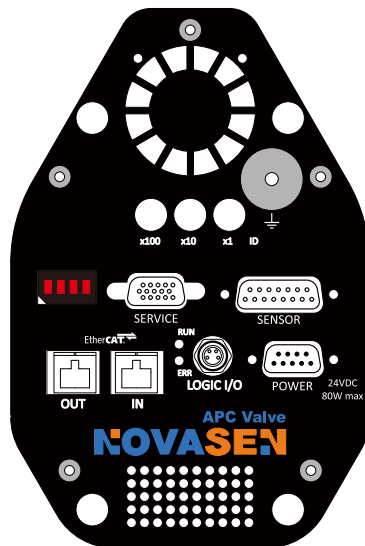


EtherCAT

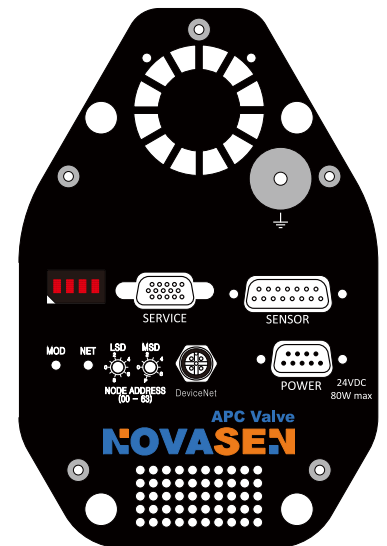


DeviceNet

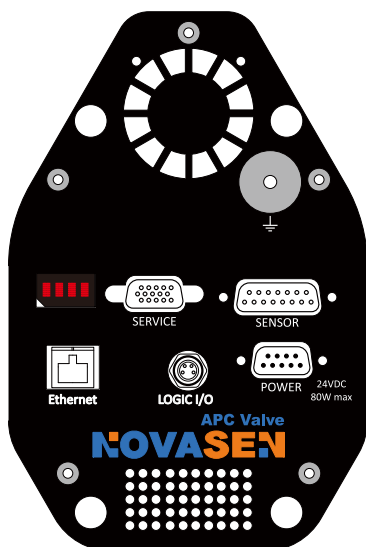

Ethernet

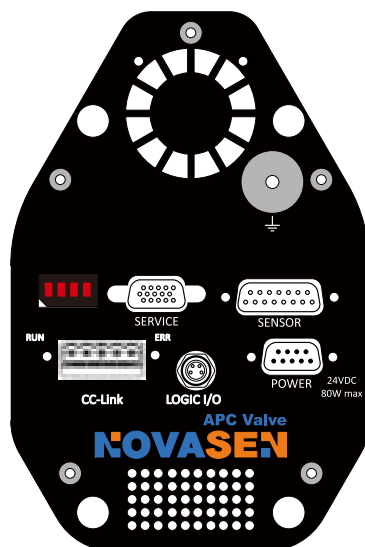

CC-Link



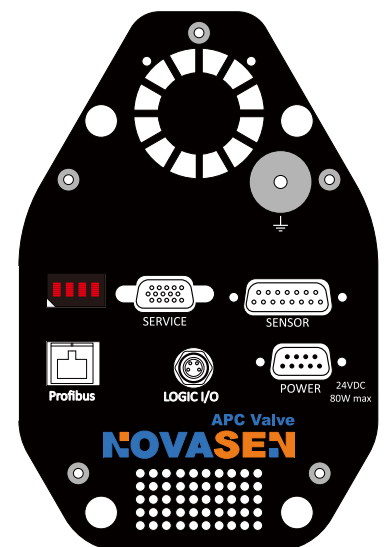


Profibus

ELECTRICAL CONNECTIONS

	CONNECTION	TYPE
POWER	Power input	DB-9 male
SENSOR	Sensor input	DB-15 female
	Sensor power supply	
INTERFACE	RS232, Logic, RS422, RS485	DB-25 female
	DeviceNet®	Micro-style male
	Ethernet	RJ-45
BUS Modules	Profibus	DB-9 female
	CC-Link	5-pole terminal screw
	EtherCAT	RJ-45 x 2




PENDULUM DN100(4")

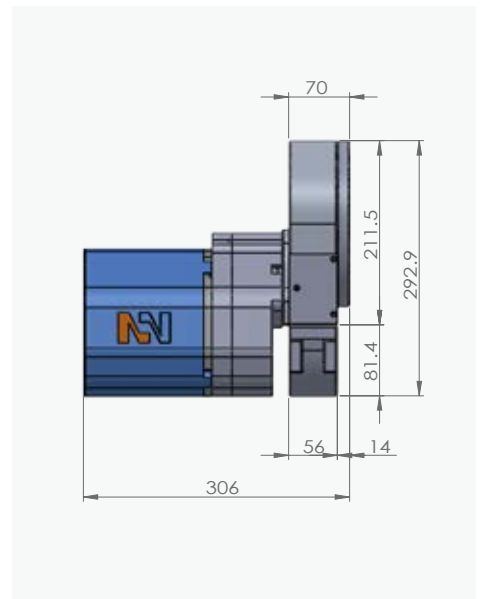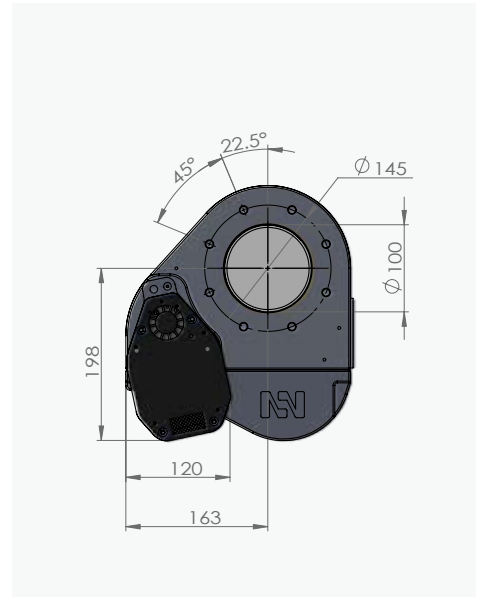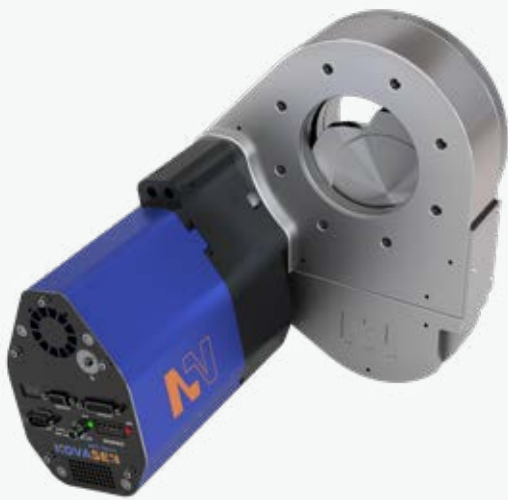

Product Specification

DN (nominal I.D.)		Conductance in open position (molecular flow)	Minimum controllable conductance (molecular flow)	Max. differential pressure on the plate	Max. differential pressure during operation	Compressed air min. - max. overpressure		Operating time for throttling	Typical closing / opening time open -> closed	Typical closing / opening time closed -> open	Weight (approx.)	
mm	inch	ls-1	ls-1	mbar	mbar	bar	psi	s	s	s	kg	lbs
100	4	1,700	3	1,200	30	4-7	58-102	0.7	3	4	12	27




PENDULUM DN160(6")

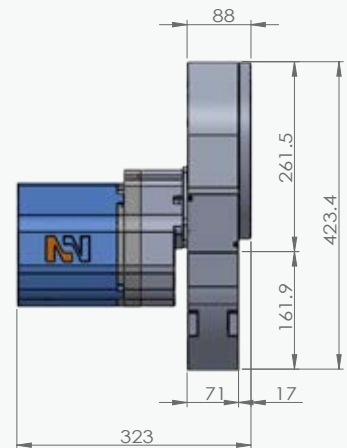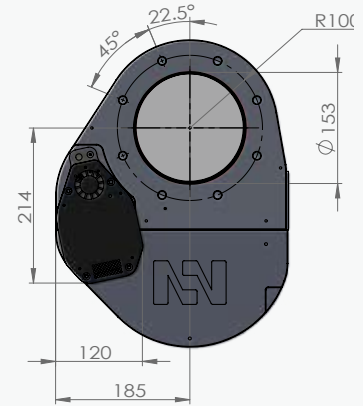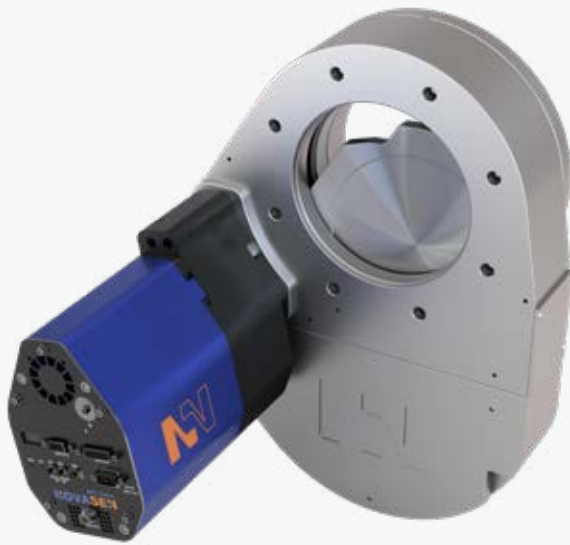

Product Specification

DN (nominal I.D.)		Conductance in open position (molecular flow)	Minimum controllable conductance (molecular flow)	Max. differential pressure on the plate	Max. differential pressure during operation	Compressed air min. - max. overpressure		Operating time for throttling	Typical closing / opening time open -> closed	Typical closing / opening time closed -> open	Weight (approx.)	
mm	inch	ls-1	ls-1	mbar	mbar	bar	psi	s	s	s	kg	lbs
160	6	5,000	5	1,200	10	4-7	58-102	0.8	3	4	18	40




PENDULUM DN250(10")

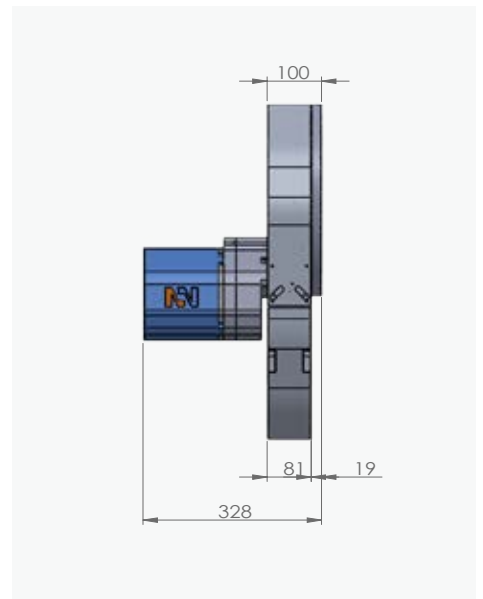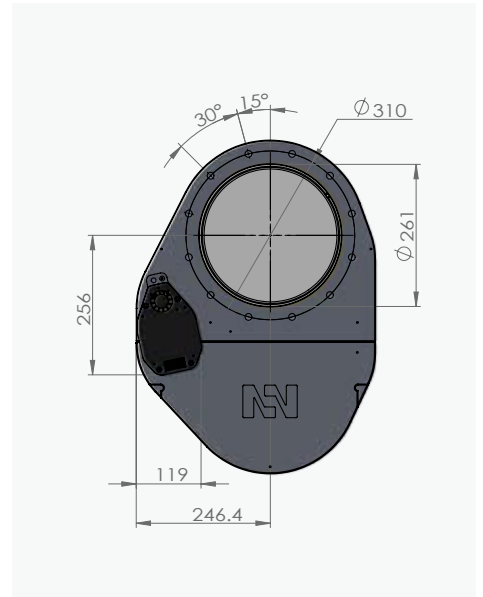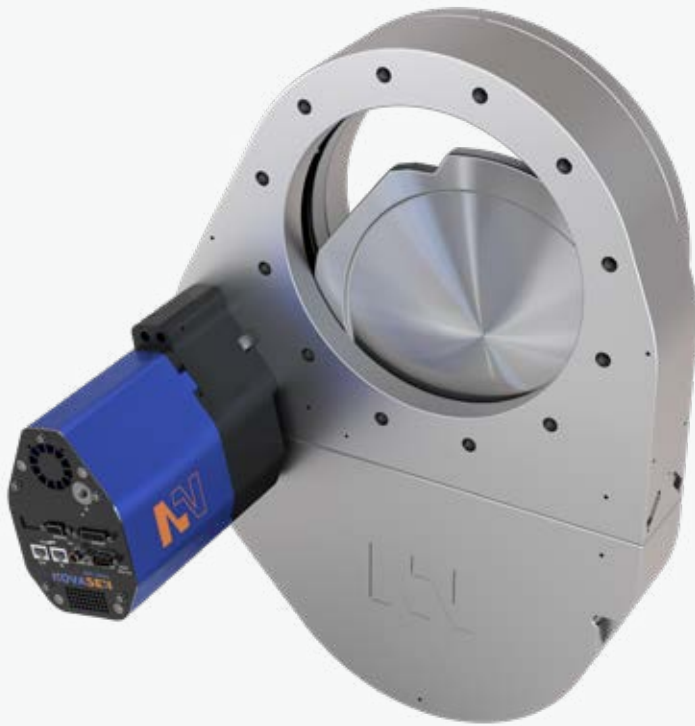

Product Specification

DN (nominal I.D.)		Conductance in open position (molecular flow)	Minimum controllable conductance (molecular flow)	Max. differential pressure on the plate	Max. differential pressure during operation	Compressed air min. - max. overpressure		Operating time for throttling	Typical closing / opening time open -> closed	Typical closing / opening time closed -> open	Weight (approx.)	
mm	inch	ls-1	ls-1	mbar	mbar	bar	psi	s	s	s	kg	lbs
250	10	22,000	15	1,200	5	4-7	58-102	0.9	3	4	29	64




PENDULUM DN320(12")

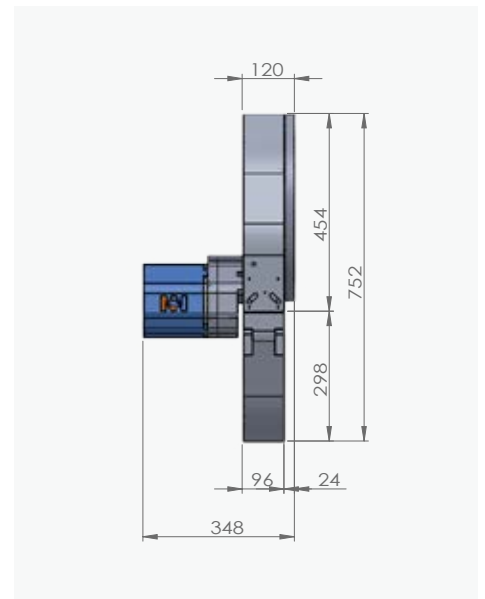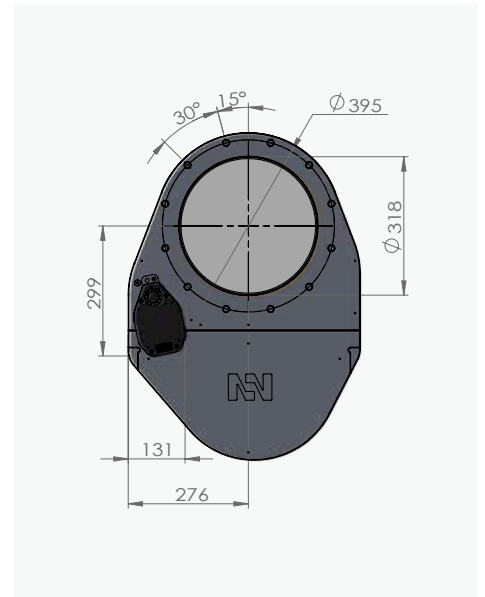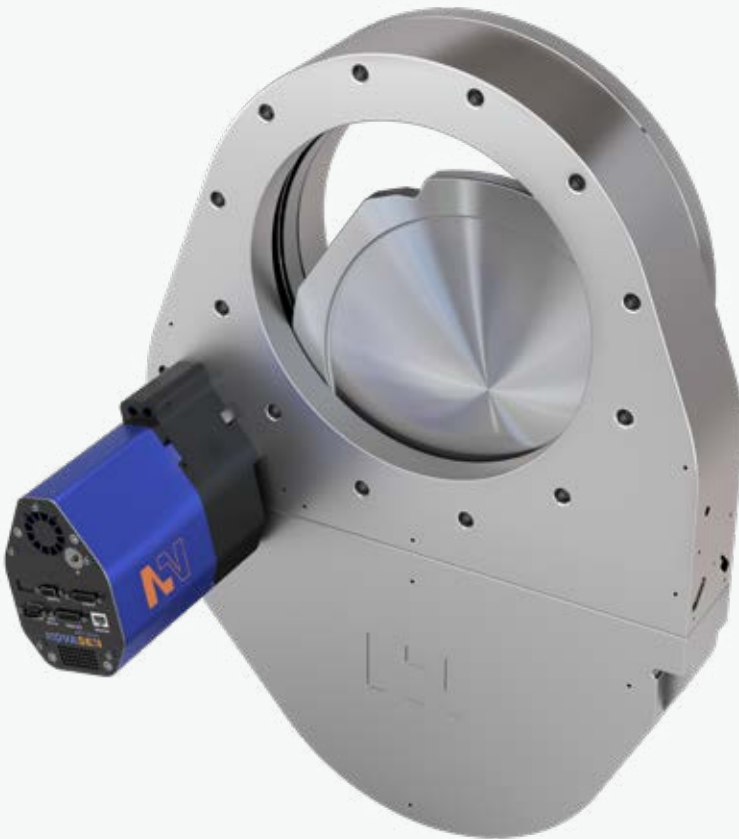

Product Specification

DN (nominal I.D.)		Conductance in open position (molecular flow)	Minimum controllable conductance (molecular flow)	Max. differential pressure on the plate	Max. differential pressure during operation	Compressed air min. - max. overpressure		Operating time for throttling	Typical closing / opening time open -> closed	Typical closing / opening time closed -> open	Weight (approx.)	
mm	inch	ls-1	ls-1	mbar	mbar	bar	psi	s	s	s	kg	lbs
320	12	30,000	22	1,200	5	4-7	58-102	1.1	5	6	48	106

PENDULUM DN350(14")

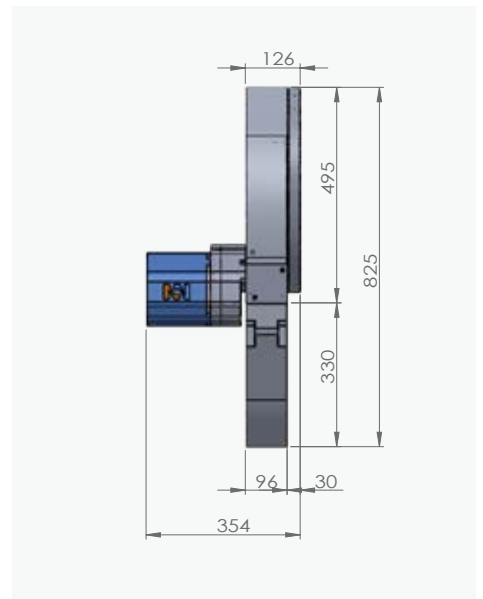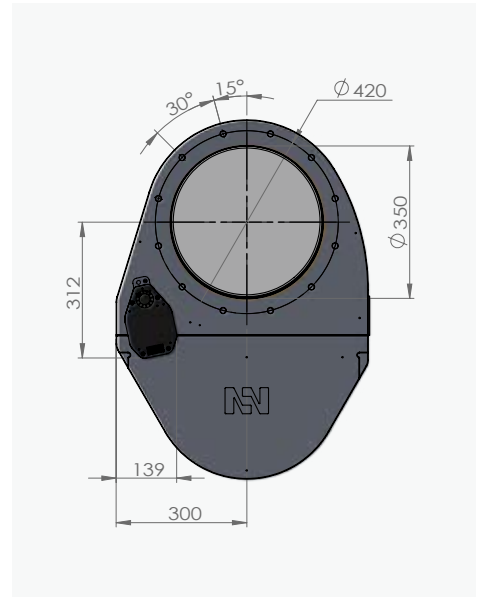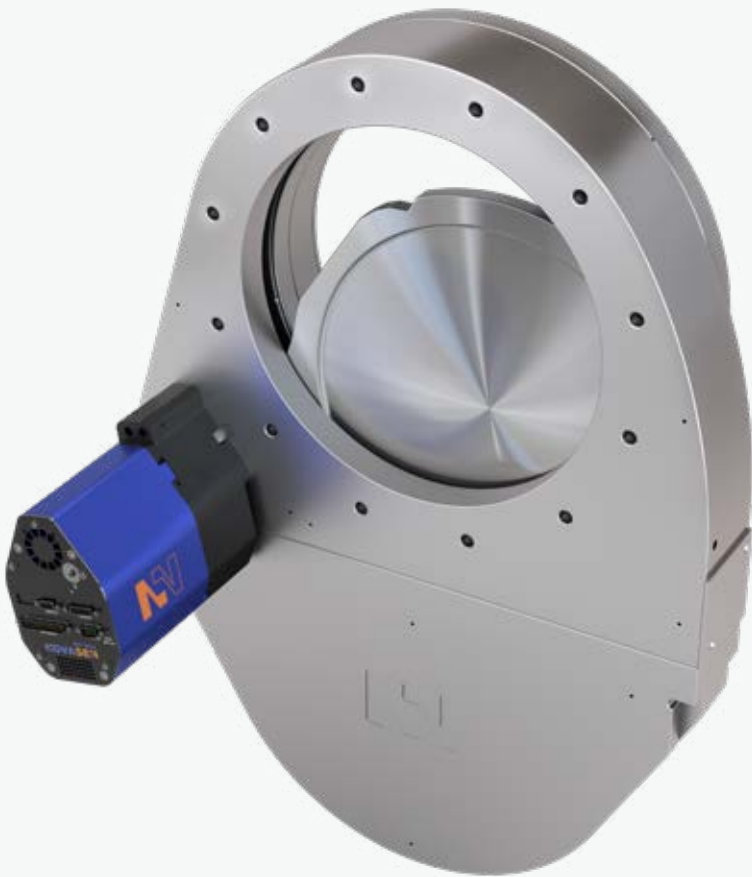

Product Specification

DN (nominal I.D.)		Conductance in open position (molecular flow)	Minimum controllable conductance (molecular flow)	Max. differential pressure on the plate	Max. differential pressure during operation	Compressed air min. - max. overpressure		Operating time for throttling	Typical closing / opening time open -> closed	Typical closing / opening time closed -> open	Weight (approx.)	
mm	inch	ls-1	ls-1	mbar	mbar	bar	psi	s	s	s	kg	lbs
350	14	43,000	25	1,200	5	4-7	58-102	1.3	5	6	59	130



NOVASEN

Head office | 25, Bansong-ro 525beon-gil,
Haeundae-gu, Busan, Republic of Korea

Branch | 508,79, Bijeon 2-ro, Pyeongtaek-si,
Gyeonggi-do, Republic of Korea

T. +82-1600-4917 | **E.** vc-sales@novasen.net

